

20w 4ft Single Elm led linear batten range

Features In Brief:

1. Energy saving exceeding 70%
2. Even light distribution
3. Colour changing chip
4. Boke isolated driver
5. Custom design light guide cover
6. High lumen output
7. >50,000hrs (see website for details)
8. Emergency and sensor versions are also available >10,000hrs (see website for details)
9. Flicker Free



Heathfield LED Linear fittings are designed to replace the traditional Batten fluorescent type. This 20w version offers in excess of 2,000lm. These fittings are a truly fit and forget solution. The even light distribution of this model and clever PMMA cover makes it a truly unique product. The fitting is ideally suited to Hospitals, Colleges and Universities. This product also benefits from a colour changing switch enabling switching between 3000k, 4000k and 6000k.


Part Number	Colour	Luminous Flux
HBATT120/6K/ELM	6000K	2,200 lm
HBATT120/4K/ELM	4000K	2,070 lm
HBATT120/3K/ELM	3000K	1,900 lm

Elm linear led batten Product Features

20w Range

Item	HBATT120/6K/ELM	HBATT120/4K/ELM	HBATT120/4K/ELM
Equivalent	4ft Single batten fitting	4ft Single batten fitting	4ft Single batten fitting
Total power consumption	20W	20W	20W
Colour	Daylight	Cool white	Warm white
Colour temperature	6000K	4000K	3000K
Life time	>50,000 hrs (>10eme)	>50,000 hrs (>10eme)	>50,000 hrs (>10eme)
Operating temperature	-10°C to + 25°C	-10°C to + 25°C	-10°C to + 25°C
Dimensions (mm)	1178 x 205 x 87	1178 x 205 x 87	1178 x 205 x 87
Lumens	2,200lm	2,070lm	1,900lm
Certificates	CE, RoHS,WEEE	CE, RoHS,WEEE	CE, RoHS,WEEE
Power factor	>90	>90	>90
CRI	80	80	80
Beam angle	°120	°120	°120

Light distribution diagram

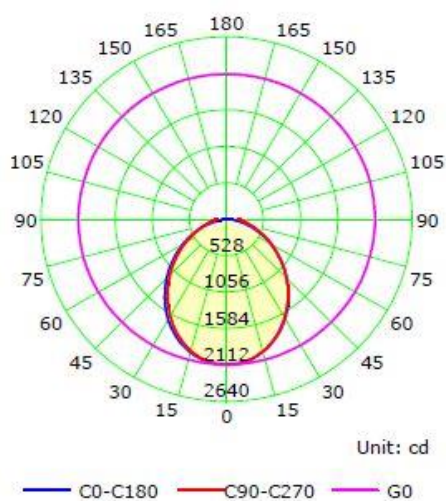

Chromaticity plot

