

## 60w 5ft Twin Elm led linear batten range

### Features In Brief:

1. Energy saving exceeding 70%
2. Even light distribution
3. Colour changing chip
4. Boke isolated driver
5. Custom design light guide cover
6. High lumen output
7. >50,000hrs (see website for details)
8. Emergency and sensor versions are also available >10,000hrs (see website for details)
9. Flicker Free



Heathfield LED Linear fittings are designed to replace the traditional Batten fluorescent type. This 60w version offers in excess of 6,000lm. These fittings are a truly fit and forget solution. The even light distribution of this model and clever PMMA cover makes it a truly unique product. The fitting is ideally suited to Hospitals, Colleges and Universities. This product also benefits from a colour changing switch enabling switching between 3000k, 4000k and 6000k.


Part Number	Colour	Luminous Flux
HBATT260/6K/ELM	6000K	6,600 lm
HBATT260/4K/ELM	4000K	6,400 lm
HBATT260/3K/ELM	3000K	6,200 lm

## Elm linear led batten Product Features

### 60w Range

Item	HBATT260/6K/ELM	HBATT260/4K/ELM	HBATT260/3K/ELM
Equivalent	5ft Twin batten fitting	5ft Twin batten fitting	5ft Twin batten fitting
Total power consumption	60W	60W	60W
Colour	Daylight	Cool white	Warm white
Colour temperature	6000K	4000K	3000K
Life time	>50,000 hrs (>10eme)	>50,000 hrs (>10eme)	>50,000 hrs (>10eme)
Operating temperature	-10°C to + 25°C	-10°C to + 25°C	-10°C to + 25°C
Dimensions (mm)	1478 x 205 x 87	1478 x 205 x 87	1478 x 205 x 87
Lumens	6,600lm	6,400lm	6,200lm
Certificates	CE, RoHS,WEEE	CE, RoHS,WEEE	CE, RoHS,WEEE
Power factor	>90	>90	>90
CRI	80	80	80
Beam angle	°120	°120	°120

### Light distribution diagram

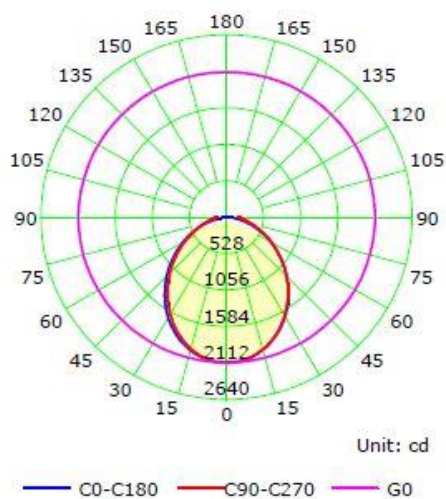

### Chromaticity plot

