

30w 4ft Beech led batten fitting

Features In Brief:

1. Energy saving exceeding 60%
2. Even light distribution
3. Original Epistar chips
4. Instant start, no flicking, no humming
5. Boke isolated driver
6. High lumen output
7. >50,000hrs (see website for details)
8. Emergency options available
>10,000hrs (see website for details)



Heathfield LED “Beech” fittings are designed to replace the traditional Batten fluorescent type. This 30w version offers in excess of 3,000lm for the 4000k and 6000k. These fittings are a truly fit and forget solution. The even light distribution of this model offers a direct replacement to traditional batten and tube arrangements. The fitting is ideally suited to Hospitals, Colleges and Universities. This product also benefits from a colour changing switch enabling switching between 3000k, 4000k and 6000k.


| Part Number | Colour | Luminous Flux |
|----------------|--------|---------------|
| HBATT430/6000K | 6000K | 3,480 lm |
| HBATT430/4000K | 4000K | 3,300 lm |
| HBATT430/3000K | 3000K | 2,900 lm |

4ft Beech led batten fitting Product Features

30w Range

| Item | HBATT430/6000K | HBATT430/4000K | HBATT430/3000K |
|-------------------------|----------------------|----------------------|---------------------|
| Equivalent | 4ft batten fitting | 4ft batten fitting | 4ft batten fitting |
| Total power Consumption | 30W | 30W | 30W |
| Colour | Daylight | Cool White | Warm White |
| Colour Temperature | 6000k | 4000k | 3000k |
| Life Time | >50,000 hrs (>10eme) | >50,000 hrs (>10eme) | >50,000 hrs(>10eme) |
| Operating Temperature | -10°C to + 40°C | -10°C to + 40°C | -10°C to + 40°C |
| Dimensions (mm) | 72x63x1160mm | 72x63x1160mm | 72x63x1160mm |
| Lumen | 3,480lm | 3,300lm | 2,900lm |
| Certificates | CE, RoHS,WEEE | CE, RoHS,WEEE | CE, RoHS,WEEE |
| Beam Angle | 130° | 130° | 130° |
| Power factor | >90 | >90 | >90 |
| CRI | 80 | 80 | 80 |

Light distribution diagram

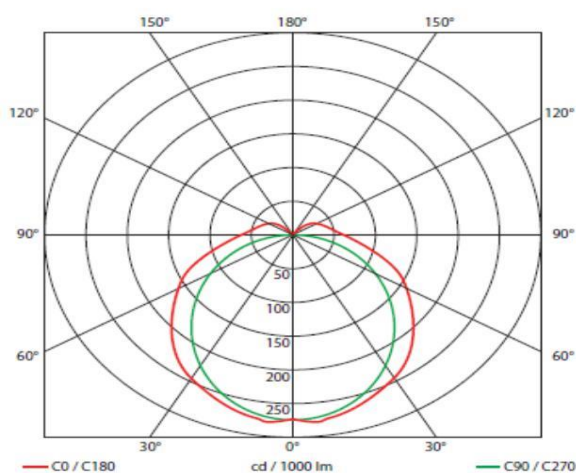

Chromaticity plot

