

Dura 25/33/42/50W Wattage Switchable LED CCT V2 Anti-Corrosive 5ft Batten

Part Code: 10276V2

The Dura LED CCT Anti-Corrosive Batten is part of one of BELL's flagship luminaire families. This fitting takes the reliability of the Dura Batten and adds CCT & wattage switchable functionality.

- The ideal replacement for Single/Twin Fluorescent T5 and T8 fixtures
- Colour Switchable
- Wattage Switchable



7 Year
Guarantee




50,000
Life Hours



IP66
Rated



220/240
Volts

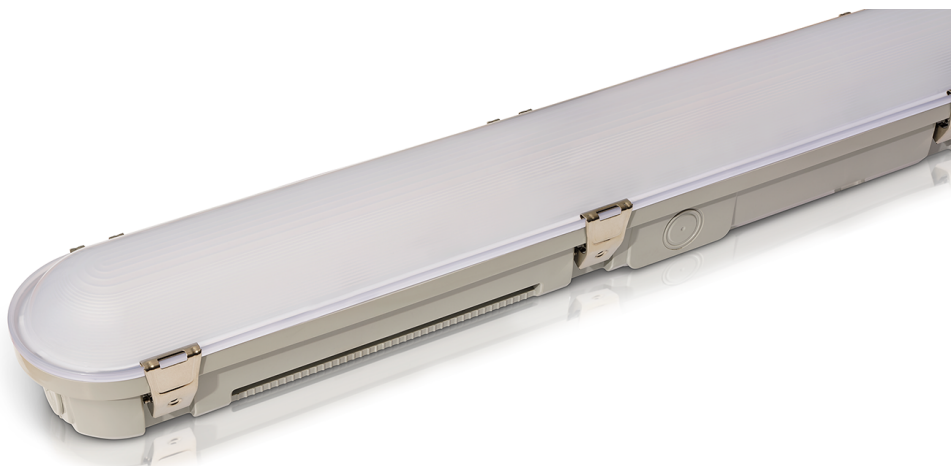

LED Integrated CCT Anti Corrosive Batten



Product Category Fittings / Fittings

Application LED Batten

Product Warranty 7 Years

EAN 5013588002811

Commodity Code 9405423100

Country of Origin CN

Technical Specification

Watts (W)	25/33/42/50
Volts (V)	220/240
Colour Temp (K)	3000/4000/6000
Lumens (lm)	25W = 3840 (3000K) / 4043 (4000K & 6000K) - 33W = 4921 (3000K) / 5354 (4000K) / 5187 (6000K) - 42W = 6211 (3000K) / 6651 (4000K) / 6427 (6000K) - 50W = 7035 (3000K) / 7771 (4000K) / 7587 (6000K)
Lumens per Watt (lm/W)	141-162
CRI (ra)	85
Frequency (Hz)	50/60
LED Drive Current	90mA
Energy Consumption (kWh/1000h)	50
Life Hours	50000
Switching Cycles	25000
Impact Protection	IK10
IP Rating	IP66

Packaging Information

Height (mm)	78
Width (mm)	96
Length (mm)	1570
Diameter (mm)	20
Individual Product Weight (kg)	1.7
Single Carton Height (mm)	83
Single Carton Width (mm)	100
Single Carton Depth (mm)	1575
Single Carton Weight (kg)	1.9
Individual Volume	0.0130725
Outer Box Qty	6
Outer Carton Barcode	10276V2000006
Outer Box Height (mm)	180
Outer Box Width (mm)	315
Outer Box Depth (mm)	1590
Outer Box Weight (kg)	12.7
Outer Box Volume	0.090153

LED Integrated CCT Anti Corrosive Batten

Construction	
Primary Material	Polycarbonate

Electrical Information	
Electric Class	1



LED Integrated CCT Anti Corrosive Batten

Additional Information	
Beam Angle	120°
LED Chip	Samsung