

OUTDOOR DECORATIVE WALL LIGHT CURVE PIR IP54 380LM 8W 4000K DOWN LIGHT DARK GREY INTEGRAL

ILDEA029



THIS ITEM IS NOW UPGRADED OR DISCONTINUED. CONTACT US TO FIND A REPLACEMENT PRODUCT.

Discover Integral's new outdoor range. Light up the exterior of your home with these compact, stylish and contemporary LED luminaires. Weatherproof and hard-wearing, this range is designed to last against the elements while bringing a designer look to your surroundings. Sleek and sophisticated, the Curve wall light is the ideal accessory to light up your outdoor space. This product includes a PIR sensor to automatically switch on as people walk past, ideal for safety and security.

Details

Barcode:	5055788240211
Quick Order Code:	980565
Category:	Luminaires
Range Name:	Wall Light
Product Type:	Outdoor
Market Segment:	Residential Outdoor
Features:	PIR Sensor
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	275
Product Depth (mm):	112
Product Width (mm):	117
Product Weight (g):	700
Optic:	Opal Polycarbonate diffuser
Material:	Die cast aluminium body with powder coated finish
Luminaire Fixing:	Wall Mounted
Placement / Application:	Outdoor, General Lighting

Electrical Data

Power Consumption (W) :	7.6
Power Factor:	0.8
Voltage Range (v):	220-240
Amperage (mA):	350



Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	420
Luminous efficacy (lm/W):	55
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature:	4000
Colour Temperature Name:	Cool White
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	25000
Switching Cycles:	12500

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
New Energy Rating:	G
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP54
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

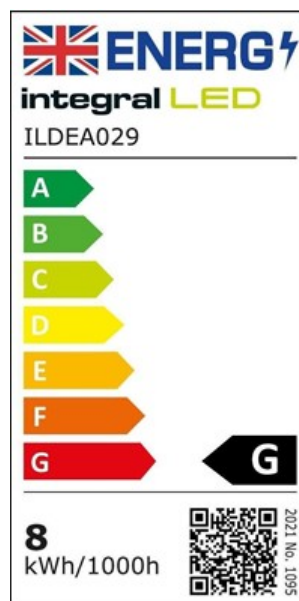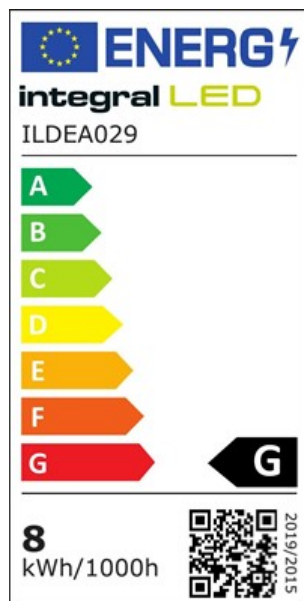

Packaging

Package Weight (g):	810
Package Length (mm):	265
Package Width (mm):	128

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Depth (mm):

122