



MASTERColour CDM-TD



MASTERColour CDM-TD 150W/830 RX7s 1CT

Range of double-ended, compact, high-efficiency, discharge lamps with a stable colour over lifetime and a crisp, sparkling light

Warnings and Safety

- · Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- $\boldsymbol{\cdot}$ The luminaire must be able to contain hot lamp parts if the lamp ruptures
- $\boldsymbol{\cdot}$ Lamps may use electronic or electromagnetic control gear
- · Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information					
Cap base	RX7s				
Operating position	P45 [Parallel +/-45D or Horizontal(HOR)]				
Flux measurement reference	Sphere				
Life to 50% failures (nom.)	16,000 h				
Light Technical					
Colour Code	830 [CCT of 3000K]				
Luminous Flux	12,750 lm				
Colour designation	Warm White (WW)				
Chromaticity Coordinate X (Nom)	0.434				
Chromaticity Coordinate Y (Nom)	0.398				
Correlated Colour Temperature (Nom)	3000 K				
Luminous efficacy (rated) (nom.)	87 lm/W				
· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·				

Colour rendering index (CRI)	88
Arc Length O (Nom)	10 mm
Operating and Electrical	
Power Consumption	147.0 W
Voltage (nom.)	98 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Lamp Finish	Clear
Bulb shape	T22
	-


Datasheet, 2023, April 16 data subject to change

MASTERColour CDM-TD

Net Weight (Piece)	26.700 g
Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) content (max.)	10.2 mg
Mercury (Hg) content (nom.)	10.23 mg
Energy consumption kWh/1,000 hours	147 kWh
EPREL Registration Number	473334
Product Data	
Order product name	MASTERC CDM_TD 150W/830 PY7c 1CT


Full product name	MASTERColour CDM-TD 150W/830 RX7s 1CT			
Full EOC	871150019784915			
Order code	19784915			
Material no. (12 NC)	928083605133			
Local order code	150CDMTD830			
Numerator – quantity per pack	1			
EAN/UPC — Product/Case	8711500197849			
Numerator – packs per outer box	12			
EAN/UPC - Case	8711500197856			


Dimensional drawing

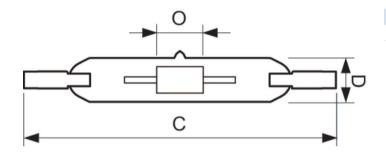


Product	D (max)	D	0	C (max)
MASTERC CDM-TD 150W/830 RX7s 1CT	22 mm		10 mm	137.43 mm

Photometric data





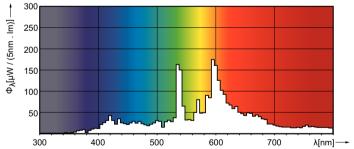



Light Distribution Diagram - MASTERC CDM-TD 150W/830 RX7s 1CT

Spectral Power Distribution Colour - MASTERC CDM-TD 150W/830 RX7s 1CT

MASTERColour CDM-TD

Lifetime

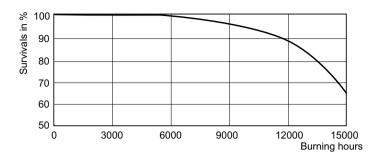



LDLE_CDM-TD_0001-Life expectancy diagram

Lumen Maintenance Diagram - MASTERC CDM-TD 150W/830 RX7s 1CT



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.