

Heathfield 1200X600 Back lit LED panel range

Features In Brief:

1. Energy saving up to 60%
2. Even light output
3. Instant start, no flicking, no humming.
4. Adjustable CCT- 3000k/4000k/6000k
5. Unique circuit design, each group of LEDs work separately, avoiding any problem with light output caused or influenced by single faulty LED.
6. No RF interference
7. >10,000hrs (see website for details)

3CCT Adjustable



Our range of LED panels are designed to replace the traditional ceiling tile fitting with ease. Using High brightness 2835 LED chips we achieve 100lm/w and an even light output. The range utilises a flicker free driver making it ideal for sensitive areas. With the addition of a colour changing switch this product can offer 3000k - 4000k and 6000k all from the same fitting.

Part Number	Colour	Luminous Flux
HPAN12600BL/6000K	6000K	5000 lm
HPAN12600BL/4000K	4000K	4800 lm
HPAN12600BL/3000K	3000K	4720 lm


Heathfield 1200X600 Back lit LED panel Features

1200x600 Range

Item	HPAN12600BL/6K	HPAN12600BL/4K	HPAN12600BL/3K
Input voltage	AC 220-240V	AC 220-240V	AC 220-240V
Rated current	1000mA	1000mA	1000mA
Power consumption	50w	50w	50w
Colour temperature	Daylight	Cool white	Warm white
Life time	>10,000 hrs	>10,000 hrs	>10,000 hrs
Operating temperature	-10°C to + 50°C	-10°C to + 50°C	-10°C to + 50°C
Storage temperature	-10°C to + 60°C	-10°C to + 60°C	-10°C to + 60°C
Lumens	5000lm	4800lm	4720lm
Certificates	CE, RoHS °	CE, RoHS °	CE, RoHS °
Weight	3.5kg	3.5kg	3.5kg
Size	1195*595*85mm	1195*595*85mm	1195*595*85mm
Water resistance	IP20	IP20	IP20

Light distribution graph

Radiation diagram

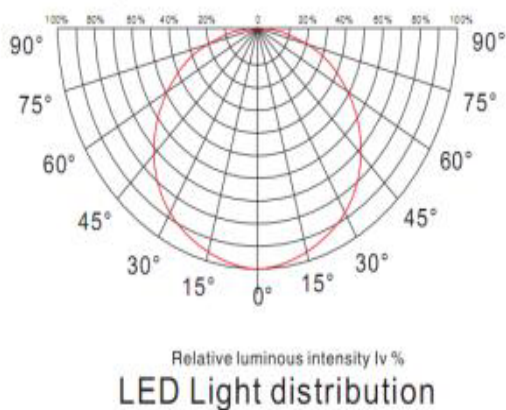

Illumination intensity chart

