


## 12W Hawthorn led downlight range

### Features In Brief:

1. Energy saving exceeding 60%
2. Uniformed light distribution
3. Original Epistar chips
4. Instant start, no flicking, no humming
5. Dali/1-10v/DSI versions available
6. >50,000hrs (see website for details)
7. CE, RoHS , FCC and WEEE certificates

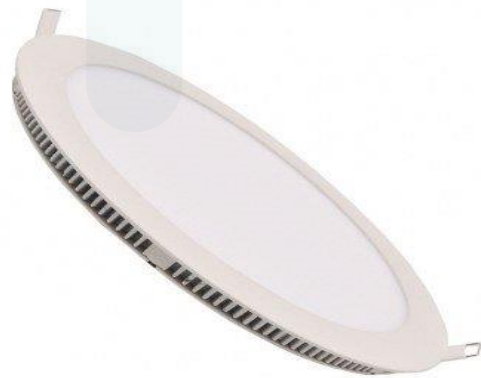

Heathfield LED downlights are designed to replace the traditional PL downlights commonly seen within offices and communal areas. The solid construction of this unit offers both uniformed light distribution as well as maintenance free operation. The downlight comes prewired with driver and has dimming options for 1-10v/DALI/DSI. Using original Epistar chips this unit is truly a fit and forget solution.


Part Number	Colour	Luminous Flux
HDL12/HAW/6000k	6000K	1056 lm
HDL12/HAW/4000K	4000K	1020 lm
HDL12/HAW/3000K	3000K	984 lm

## 12W led Hawthorn downlight Product Features

### 12w Range

Item	HDL12/HAW/6000K	HDL12/HAW/4000K	HDL12/HAW/3000K
Input voltage	100-240V	100-240V	100-240V
Power consumption	12W	12W	12W
Colour temperature	Daylight	Cool white	Warm white
Life time	>50,000 hrs	>50,000 hrs	>50,000 hrs
Operating temperature	-10°C to + 65°C	-10°C to + 65°C	-10°C to + 65°C
Storage temperature	-10°C to + 60°C	-10°C to + 60°C	-10°C to + 60°C
Lumen	1056lm	1020lm	984lm
Beam angle	100°	100°	100°
Outer dimensions	Ø170x12mm	Ø170x12mm	Ø170x12mm
Cut out size	158mm	158mm	158mm
IP Rating	IP22	IP22	IP22
CRI	80	80	>80

### Chromaticity Diagram

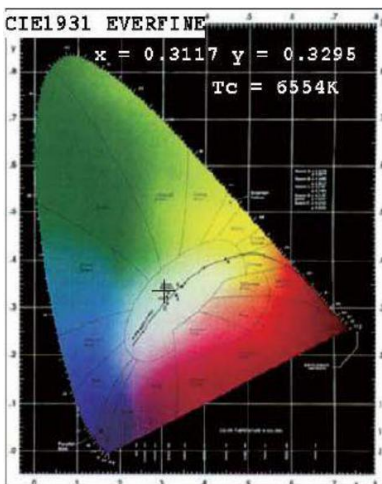

### Product dimensions

