

24W Hawthorn led downlight range

Features In Brief:

1. Energy saving exceeding 60%
2. Uniformed light distribution
3. Original Epistar chips
4. Instant start, no flicking, no humming
5. Dali/1-10v/DSI versions available
6. >50,000hrs (see website for details)
7. CE, RoHS , FCC and WEEE certificates



Heathfield LED downlights are designed to replace the traditional PL downlights commonly seen within offices and communal areas. The solid construction of this unit offers both uniformed light distribution as well as maintenance free operation. The downlight comes prewired with driver and has dimming options for 1-10v/DALI/DSI. Using original Epistar chips this unit is truly a fit and forget solution.


Part Number	Colour	Luminous Flux
HDL24/HAW/6000k	6000K	2112 lm
HDL24/HAW/4000K	4000K	2006 lm
HDL24/HAW/3000K	3000K	1905 lm

24W led Hawthorn downlight Product Features

24w Range

Item	HDL24/HAW/6000K	HDL24/HAW/4000K	HDL24/HAW/3000K
Input voltage	100-240V	100-240V	100-240V
Power consumption	24W	24W	24W
Colour temperature	Daylight	Cool white	Warm white
Life time	>50,000 hrs	>50,000 hrs	>50,000 hrs
Operating temperature	-10°C to + 65°C	-10°C to + 65°C	-10°C to + 65°C
Storage temperature	-10°C to + 60°C	-10°C to + 60°C	-10°C to + 60°C
Lumen	2112lm	2040lm	1968lm
Beam angle	110°	110°	110°
Outer dimensions	Ø240x12mm	Ø240x12mm	Ø240x12mm
Cut out size	225mm	225mm	225mm
IP Rating	IP44	IP44	IP44
CRI	>80	>80	>80

Chromaticity Diagram

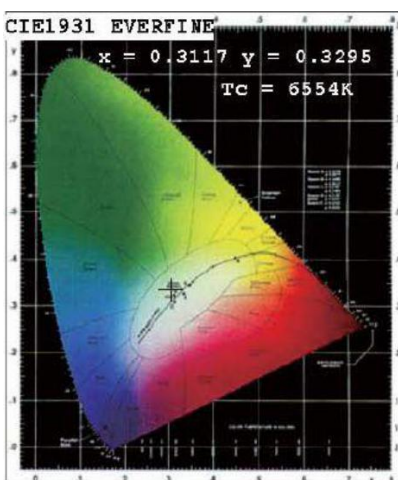

Product dimensions

