

Heathfield 600X600 Back lit LED panel range

Features In Brief:

1. Energy saving up to 60%
2. Even light output
3. Instant start, no humming
4. Unique circuit design, each group of LEDs work separately, avoiding any problem with light output caused or influenced by single faulty LED
5. No RF interference
6. >10,000hrs (see website for details)



Our range of LED panels are designed to replace the traditional ceiling tile fitting with ease. Using High brightness 2835 LED chips we achieve 130lm/w and an even light output. The range utilises a flicker free driver making it ideal for sensitive areas.

Part Number	Colour	Luminous Flux
HPAN600BL/6000K	6000K	3900 lm
HPAN600BL/4000K	4000K	3800 lm
HPAN600BL/3000K	3000K	3720 lm


Heathfield 600X600 Back lit LED panel Features

600x600 Range

Item	HPAN600BL/6K	HPAN600BL/4K	HPAN600BL/3K
Input voltage	AC 220-240V	AC 220-240V	AC 220-240V
Rated current	1000mA	1000mA	1000mA
Power consumption	30w	30w	30w
Colour temperature	Daylight	Cool white	Warm white
Life time	>10,000 hrs	>10,000 hrs	>10,000 hrs
Operating temperature	-10°C to + 50°C	-10°C to + 50°C	-10°C to + 50°C
Storage temperature	-10°C to + 60°C	-10°C to + 60°C	-10°C to + 60°C
Lumens	3900lm	3800lm	3720lm
Certificates	CE, RoHS °	CE, RoHS °	CE, RoHS °
Weight	2.5kg	2.5kg	2.5kg
Size	595*595*85mm	595*595*85mm	595*595*85mm
Water resistance	IP20	IP20	IP20

Light distribution graph

Radiation diagram

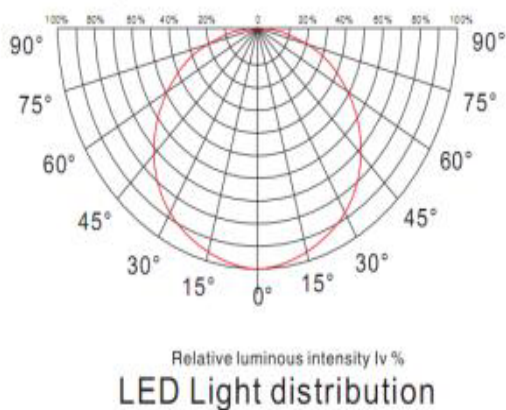

Illumination intensity chart

