


## T5 1449mm LED Kingswood tube Gen2

### Features In Brief:

1. Energy saving exceeding 50%
2. Uniformed light distribution
3. Instant start, no flicking, no humming
4. Non-rotatable end caps
5. Unique driver design
6. Internal driver
7. >50,000hrs (see website for details)

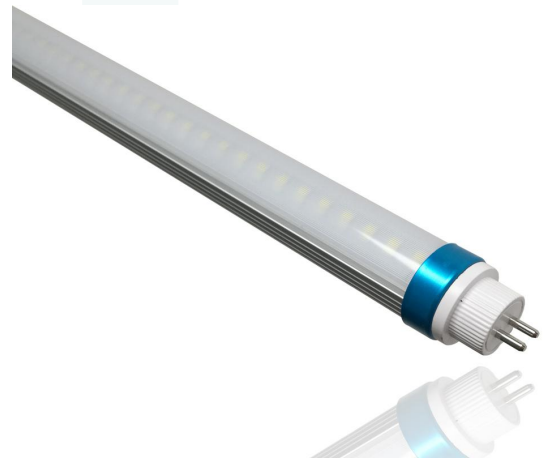

Heathfield LED Tubes are designed to replace the traditional fluorescent tube offering an energy saving alternative. The tube is constructed of a high grade aluminium heat sync and custom designed light guide lens offering a uniformed light distribution, using our specifically designed driver and we can offer a stable operation with long life time claims and low optical decay levels.

Part Number	Colour	Luminous Flux
T520LED/6000K/ID/GEN2	6000K	2400 lm
T520LED/4000K/ID/GEN2	4000K	2280 lm
T520LED/3000K/ID/GEN2	3000K	2165 lm


## T5 1449mm LED Kingswood tube Gen2 Product Features

### 20w Range

Item	T520LED/6000K/ID	T520LED/4000K/ID	T520LED/3000K/ID
Input Voltage	100-277V	100-277V	100-277V
Power Consumption	20W	20W	20W
Colour	Daylight	Cool White	Warm White
Colour Temperature	6000k	4000k	3000k
Life Time	>50,000 hrs	>50,000 hrs	>50,000 hrs
Operating Temperature	-10°C to + 45°C	-10°C to + 45°C	-10°C to + 45°C
Storage Temperature	-10°C to + 45°C	-10°C to + 45°C	-10°C to + 45°C
Lumen	2400lm	2280lm	2165lm
Certificates	CE, RoHS, WEEE	CE, RoHS, WEEE	CE, RoHS, WEEE
Beam Angle	120°	120°	120°
Dimensions	1449x22mm	1449x22mm	1449x22mm
CRI	80	80	80

\*Based on clear cover lens

### Tube Images

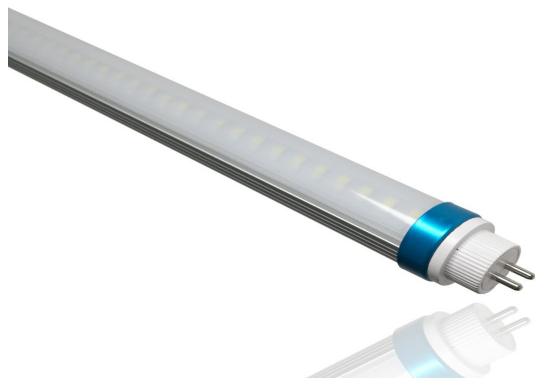

### Wiring Diagram

